

OREL

Empowering
Humanity



Illuminating Lives Across the Globe

ORANGE[®]
ELECTRIC

OREL



Empowering Humanity

We are a multinational company, in Electrical, Lighting and Digital infrastructure products, we employ in excess of 5000 personnel across 6 continents.

We empower humanity by creating a brighter, cleaner and smarter future for everyone. From switches to smart techs to water saving, our products, technologies and services are class leading solutions for buildings and the built environment in both developed and developing countries, for today and creating a sustainable environment for the future generations.

What We Do



**Artificial
Intelligence**



Transportation



Health Care



Education



**Internet
of Things**



**Building
Infrastructure**



**Digital
Infrastructure**



**Digital
Commerce**

Our Brands

Orel has a wide portfolio of global brands across Electrical, Lighting and Digital infrastructure.



Energy Enhanced

Orange Electric provides solutions in the sphere of energy with special attention to design and efficiency.



Smarter Habitat

Qbus develops products & technologies that turn homes, offices, hotels, factories & even hospitals into smart buildings. Smart solutions for convenience and energy-savings.



Building a Greener Future

Creating a brighter, cleaner future through class leading solutions, proven to reduce energy, water and maintenance costs and to reduce carbon footprint.



Seamless Mobile Payments

OrelPay allows users to link their bank accounts and credit cards with the OrelPay mobile app and carry out transactions by simply scanning a QR code.



Connecting the World

Offering complete end-to-end Network & Connectivity Solutions for industrial, commercial, medical and military sectors.



Electrical Busduct Solutions

Superbar offers world class Low Voltage Electrical Busbar Trunking Systems to meet the ever demanding and complex global.



Transportation at a Click

OrelGo is an App based taxi and delivery booking solution that's convenient, economical and brings you safely to your destination.



Smart Options for Smart People

OrelBuy is focused on providing the unequivocal online shopping experience for both consumer and retail partners at an unrivalled level of service.



Energy Enhanced

Our wide portfolio of Building Infrastructure products are innovative and of outstanding quality and value, intended to Empower Humanity by creating a brighter, cleaner and smarter future for everyone across the globe.

Orange Electric provides solutions in the sphere of energy with special attention to design and efficiency. We have a range of Batteries, Home Appliances, Allied Accessories, Switches, Sockets, Wires, Cables, Circuit Breakers, Plugs and Connectors. In addition we have industrial products under Cable Management, Switch Gears, Enclosures, Busbar Trunking, Power D/Boards, Energy Optimizer, Generators, Solar, Elevators, and Electronic Robots.



Content

- 01 LED LAMP
- 02 LED HIGH POWER LAMP
- 03 LED CANDLE LAMP - FROSTED
- 04 LED SPOT LAMP - GU10 | MR16
- 05 STICK LAMPS
- 06 LED T8 GLASS TUBE
- 07 ADJUSTABLE CEILING LIGHT - SQUARE
- 08 ADJUSTABLE CEILING LIGHT - CIRCULAR
- 09 CEILING LIGHT - SURFACE MOUNTED CIRCULAR PANEL
- 10 CEILING LIGHT - SURFACE MOUNTED SQUARE PANEL
- 11 CEILING LIGHT - RECESSED MOUNTED CIRCULAR PANEL
- 12 CEILING LIGHT - RECESSED MOUNTED SQUARE PANEL
- 14 CEILING LIGHT - HIGH POWER RECESSED MOUNTED CIRCULAR PANEL
- 16 CEILING LIGHT - HIGH POWER RECESSED MOUNTED SQUARE PANEL
- 17 LED FLAT PANEL LIGHT - 60X60CM
- 18 LED HIGH BAY LIGHT
- 19 LED FLOOD LIGHT
- 20 LED FLOOD LIGHT (SMD TYPE)
- 21 LED RECESSED DOWNLIGHT
- 22 LED STREET LIGHT
- 23 T8 BATTEN FIXTURE
- 24 LED GRILL PANEL LIGHT - 60X60CM
- 25 FRAME FOR LED PANEL LIGHT - 60X60CM

Making The World A Brighter Place

ORANGE ELECTRIC is a well renowned brand name that's synonymous with quality lighting, offering value through a range of solutions across the globe. We at Orel Corporation constantly strive for continuous development in our portfolio of lighting solutions and maintain stringent tests to ascertain the quality of our bulbs before it reaches our consumers.

Our solutions range from standard LED bulbs, special bulbs such as Candle Lights and Spotlights to Tubes and Panels. ORANGE ELECTRIC lighting solutions comply to Sri Lankan Standards (SLS) and International Electrotechnical Commission (IEC) standards, assuring durability and energy efficiency wherever it shines.

We maintain precise parameters in terms of Lumens, Efficacy, Beam angles and Correlated Colour Temperature (CCT) to ensure that quality standards are retained at an optimum level.



LED LAMP

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	Lamp Base	Dimension
744-2041	9W	6500K	810lm	≥80	230°	≥0.5	175-265V~	E27	60*108mm
744-2042	9W	4000K	810lm	≥80	230°	≥0.5	175-265V~	E27	60*108mm
744-2043	9W	3000K	760lm	≥80	230°	≥0.5	175-265V~	E27	60*108mm
744-2023	11W	6500K	990lm	≥80	230°	≥0.5	175-265V~	E27	60*110mm
744-2024	11W	3000K	910lm	≥80	230°	≥0.5	175-265V~	E27	60*110mm
744-2025	11W	4000K	990lm	≥80	230°	≥0.5	175-265V~	E27	60*110mm
744-2044	15W	6500K	1350lm	≥80	230°	≥0.5	175-265V~	E27	65*130mm
744-2045	15W	4000K	1350lm	≥80	230°	≥0.5	175-265V~	E27	65*130mm
744-2046	15W	3000K	1350lm	≥80	230°	≥0.5	175-265V~	E27	65*130mm



LED HIGH POWER LAMP

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	Lamp Base	Dimension
727-2008	20W	6500K	1600lm	≥80	230°	≥0.5	160-240V~	E27	80*142mm
727-2007	20W	3000K	1600lm	≥80	230°	≥0.5	160-240V~	E27	80*142mm
727-2017	30W	6500K	2400lm	≥80	230°	≥0.5	160-240V~	E27	100*172mm
727-2018	30W	3000K	2800lm	≥80	230°	≥0.5	160-240V~	E27	100*172mm
727-2043	50W	6500K	4000lm	≥80	230°	≥0.5	160-240V~	E27	140*235mm
727-2044	50W	3000K	5000lm	≥80	230°	≥0.5	160-240V~	E27	140*235mm



LED LAMP - CANDLE FROSTED

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	Lamp Base	Dimension
746-3014	6W	6500K	480lm	≥80	230°	≥0.5	160-240V~	E14	37*100mm
746-3013	6W	3000K	430lm	≥80	230°	≥0.5	160-240V~	E14	37*100mm
746-3017	6W	4000K	480lm	≥80	230°	≥0.5	160-240V~	E27	37*100mm
746-2014	6W	6500K	480lm	≥80	230°	≥0.5	160-240V~	E27	37*100mm
746-2013	6W	3000K	430lm	≥80	230°	≥0.5	160-240V~	E27	37*100mm



LED SPOT LAMP - GU10 - Dimmable

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	Lamp Base	Dimension
746-6010	7W	6500K	510lm	≥80	38°	≥0.5	160-240V~	GU10	50*55mm
746-6009	7W	3000K	470lm	≥80	38°	≥0.5	160-240V~	GU10	50*55mm

LED SPOT LAMP - GU10 - Non-Dimmable

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	Lamp Base	Dimension
746-6005	7W	6500K	510lm	≥80	38°	≥0.5	160-240V~	GU10	50*55mm
746-6006	7W	3000K	470lm	≥80	38°	≥0.5	160-240V~	GU10	50*55mm

LED SPOT LAMP - MR16 (AC) - Non-Dimmable

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	Lamp Base	Dimension
746-5005	7W	6500K	510lm	≥80	38°	≥0.5	160-240V~	GU5.3	50*55mm
746-5006	7W	3000K	470lm	≥80	38°	≥0.5	160-240V~	GU5.3	50*55mm
746-5011	7W	4000K	560lm	≥80	38°	≥0.5	160-240V~	GU5.3	50*57mm



STICK LAMPS

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	Lamp Base	Dimension
746-2020	9W	6500K	760lm	≥80	230°	≥0.5	175-265V~	E27	Ø37*115mm
746-2021	9W	3000K	760lm	≥80	230°	≥0.5	175-265V~	E27	Ø37*115mm
746-2022	12W	6500K	980lm	≥80	230°	≥0.5	175-265V~	E27	Ø43*135mm
746-2023	12W	3000K	980lm	≥80	230°	≥0.5	175-265V~	E27	Ø43*135mm



LED T8 GLASS TUBE

With Sensor

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	SDCM	Dimension
714-6139	18W	6500K	1400lm	≥70	360°	≥0.5	185-265V~	≤7	Ø28*1198mm(4FT)

Without Sensor

ITEM CODE	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	SDCM	Dimension
714-5132	9W	6500K	700lm	≥70	360°	≥0.5	185-265V~	≤7	Ø28*590mm(2FT)
714-5133	9W	3000K	700lm	≥70	360°	≥0.5	185-265V~	≤7	Ø28*590mm(2FT)
714-6137	18W	6500K	1400lm	≥70	360°	≥0.5	185-265V~	≤7	Ø28*1198mm(4FT)
714-6138	18W	3000K	1400lm	≥70	360°	≥0.5	185-265V~	≤7	Ø28*1198mm(4FT)
714-6141	18W	4000K	1400lm	≥70	360°	≥0.5	185-265V~	≤7	Ø28*1198mm(4FT)
714-6140	18W	6500K	1400lm	≥70	360°	≥0.5	185-265V~	≤7	Ø28*1198mm(4FT)



ADJUSTABLE CEILING LIGHT - SQUARE

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	Cut Out	Dimension
750-3602	7W	6500K	450lm	≥80	120°	≥0.5	160-240V~	Ø70mm	95*95*47mm
750-3601	7W	3000K	420lm	≥80	120°	≥0.5	160-240V~	Ø70mm	95*95*47mm



ADJUSTABLE CEILING LIGHT - CIRCULAR

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	Cut Out	Dimension
750-3102	7W	6500K	450lm	≥80	120°	≥0.5	160-240V~	Ø70mm	Ø95*47mm
750-3101	7W	3000K	420lm	≥80	120°	≥0.5	160-240V~	Ø70mm	Ø95*47mm
750-3103	7W	4000K	500lm	≥80	120°	≥0.5	160-240V~	Ø75mm	Ø95*47mm



CEILING LIGHT - SURFACE MOUNTED CIRCULAR PANEL

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	SDCM	Dimension
750-4101	6W	6500K	300lm	≥70	160°	≥0.5	185-265V~	≤9	Ø120*H30mm
750-4103	12W	6500K	600lm	≥70	160°	≥0.5	185-265V~	≤9	Ø170*H30mm
750-4104	12W	3000K	600lm	≥70	160°	≥0.5	185-265V~	≤9	Ø170*H30mm
750-4105	18W	6500K	900lm	≥70	160°	≥0.5	185-265V~	≤9	Ø220*H30mm
750-4106	18W	3000K	900lm	≥70	160°	≥0.5	185-265V~	≤9	Ø220*H30mm
750-4107	24W	6500K	1500lm	≥70	160°	≥0.5	185-265V~	≤9	Ø300*H30mm
750-4108	24W	3000K	1500lm	≥70	160°	≥0.5	185-265V~	≤9	Ø300*H30mm
750-4111	36W	6500K	2500lm	≥70	160°	≥0.5	185-265V~	≤7	Ø400mm
750-4112	36W	3000K	2500lm	≥70	160°	≥0.5	185-265V~	≤7	Ø400mm



CEILING LIGHT - SURFACE MOUNTED SQUARE PANEL

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	SDCM	Dimension
750-4605	18W	3000K	1350lm	≥70	120°	≥0.5	185-265V~	≤7	220*220*35mm
750-4606	18W	6500K	1450lm	≥70	120°	≥0.5	185-265V~	≤7	220*220*35mm
750-4607	24W	6500K	1900lm	≥70	120°	≥0.5	185-265V~	≤7	300*300*35mm
750-4608	24W	3000K	1800lm	≥70	120°	≥0.5	185-265V~	≤7	300*300*35mm
750-4611	40W	6500K	2800lm	≥70	160°	≥0.5	185-265V~	≤7	600*600*35mm
750-4612	40W	3000K	2800lm	≥70	160°	≥0.5	185-265V~	≤7	600*600*35mm



CEILING LIGHT - RECESSED MOUNTED CIRCULAR PANEL

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	Cut Out	Dimension
750-1103	12W	6500K	600lm	≥70	160°	≥0.5	185-265V~	Ø155mm	Ø170*H13mm
750-1104	12W	3000K	600lm	≥70	160°	≥0.5	185-265V~	Ø155mm	Ø170*H13mm
750-1105	18W	6500K	900lm	≥70	160°	≥0.5	185-265V~	Ø200mm	Ø220*H13mm
750-1106	18W	3000K	900lm	≥70	160°	≥0.5	185-265V~	Ø200mm	Ø220*H13mm
750-1107	24W	6500K	1200lm	≥70	160°	≥0.5	185-265V~	Ø280mm	Ø300*H13mm
750-1108	24W	3000K	1200lm	≥70	160°	≥0.5	185-265V~	Ø280mm	Ø300*H13mm



CEILING LIGHT - RECESSED MOUNTED SQUARE PANEL

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	Cut Out	Dimension
750-1605	18W	6500K	1450lm	≥70	120°	≥0.5	160-240V~	205mm	220x220mm
750-1606	18W	3000K	1350lm	≥70	120°	≥0.5	160-240V~	205mm	220x220mm



CEILING LIGHT - HIGH POWER RECESSED MOUNTED CIRCULAR PANEL

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	Cut Out	Dimension
750-1120	3W	6500K	240lm	≥80	120°	≥0.5	175-265V~	Ø80mm	Ø90*H23mm
750-1121	3W	3000K	240lm	≥80	120°	≥0.5	175-265V~	Ø80mm	Ø90*H23mm
750-1122	6W	6500K	480lm	≥80	120°	≥0.5	175-265V~	Ø100mm	Ø120*H23mm
750-1123	6W	3000K	480lm	≥80	120°	≥0.5	175-265V~	Ø100mm	Ø120*H23mm
750-1124	9W	6500K	720lm	≥80	120°	≥0.5	175-265V~	Ø125mm	Ø150*H23mm
750-1125	9W	3000K	720lm	≥80	120°	≥0.5	175-265V~	Ø125mm	Ø150*H23mm
750-1126	12W	6500K	960lm	≥80	120°	≥0.5	175-265V~	Ø160mm	Ø170*H23mm
750-1127	12W	3000K	960lm	≥80	120°	≥0.5	175-265V~	Ø160mm	Ø170*H23mm
750-1130	24W	6500K	1920lm	≥80	120°	≥0.5	175-265V~	Ø210mm	Ø225*H23mm
750-1131	24W	3000K	1920lm	≥80	120°	≥0.5	175-265V~	Ø210mm	Ø225*H23mm
750-1132	30W	6500K	2400lm	≥80	120°	≥0.5	175-265V~	Ø210mm	Ø225*H23mm
750-1133	30W	3000K	2400lm	≥80	120°	≥0.5	175-265V~	Ø210mm	Ø225*H23mm



CEILING LIGHT - HIGH POWER SURFACE MOUNTED CIRCULAR PANEL

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	SDCM	Dimension
750-4122	6W	6500K	480lm	≥80	120°	≥0.5	175-265V~	≤6	Ø120*H30mm
750-4123	6W	3000K	480lm	≥80	120°	≥0.5	175-265V~	≤6	Ø120*H30mm
750-4126	12W	6500K	960lm	≥80	120°	≥0.5	175-265V~	≤6	Ø170*H30mm
750-4127	12W	3000K	960lm	≥80	120°	≥0.5	175-265V~	≤6	Ø170*H30mm
750-4128	18W	6500K	1440lm	≥80	120°	≥0.5	175-265V~	≤6	Ø225*H30mm
750-4129	18W	3000K	1440lm	≥80	120°	≥0.5	175-265V~	≤6	Ø225*H30mm
750-4130	24W	6500K	1920lm	≥80	120°	≥0.5	175-265V~	≤6	Ø225*H30mm
750-4131	24W	3000K	1920lm	≥80	120°	≥0.5	175-265V~	≤6	Ø225*H30mm
750-4132	30W	6500K	2400lm	≥80	120°	≥0.5	175-265V~	≤6	Ø225*H30mm
750-4133	30W	3000K	2400lm	≥80	120°	≥0.5	175-265V~	≤6	Ø225*H30mm



LED FLAT PANEL LIGHT - 595X595mm

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	SDCM	Dimension
750-1612	40W	6500K	2800lm	≥70	160°	≥0.5	185-265V~	≤7	595*595*13mm
750-1613	40W	3000K	2800lm	≥70	160°	≥0.5	185-265V~	≤7	595*595*13mm
750-1614	60W	6500K	4200lm	≥70	160°	≥0.5	185-265V~	≤7	595*595*13mm
750-1615	60W	3000K	4200lm	≥70	160°	≥0.5	185-265V~	≤7	595*595*13mm



LED HIGH BAY LIGHT

COB Type

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	SDCM	Weight
792-4000	100W	6500K	8000lm	≥75	90°-120°	≥0.9	110-265V~	≤7	4200g
792-4001	150W	6500K	12000lm	≥75	90°-120°	≥0.9	110-265V~	≤7	5700g
792-4002	200W	6500K	14400lm	≥75	90°-120°	≥0.9	110-265V~	≤7	8100g

SMD Type

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	SDCM	Weight
792-4003	100W	6500K	10000lm	≥80	90°-120°	≥0.9	110-265V~	≤7	2100g
792-4004	200W	6500K	20000lm	≥80	90°-120°	≥0.9	110-265V~	≤7	5500g
792-4005	300W	6500K	30000lm	≥80	90°-120°	≥0.9	110-265V~	≤7	7200g



LED FLOOD LIGHT

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	SDCM	Weight
749-1003	20W	6500K	1800lm	≥80	38°	≥0.5	110-265V~	≤7	920g
749-1009	50W	6500K	4500lm	≥80	38°	≥0.9	110-265V~	≤7	2100g
749-1013	100W	6500K	9000lm	≥80	38°	≥0.9	110-265V~	≤7	3600g
749-1015	150W	6500K	13500lm	≥80	38°	≥0.9	110-265V~	≤7	5500g
749-1017	200W	6500K	18000lm	≥80	38°	≥0.9	110-265V~	≤7	7200g
749-1019	300W	6500K	18000lm	≥80	38°	≥0.9	110-265V~	≤7	5800g
749-1021	400W	6500K	24000lm	≥80	38°	≥0.9	110-265V~	≤7	6800g




LED FLOOD LIGHT (SMD TYPE)

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	SDCM	Weight
749-1035	50W	6500K	4500lm	≥80	120°	≥0.5	185-265V~	≤7	700g
749-1037	50W	3000K	4500lm	≥80	120°	≥0.9	110-265V~	≤7	700g
749-1041	100W	6500K	9000lm	≥80	120°	≥0.5	185-265V~	≤7	1200g
749-1043	100W	3000K	9000lm	≥80	120°	≥0.9	110-265V~	≤7	1200g
749-1047	200W	6500K	18000lm	≥80	120°	≥0.5	185-265V~	≤7	2500g
749-1049	200W	3000K	18000lm	≥80	120°	≥0.9	110-265V~	≤7	2500g
749-1050	300W	6500K	27000lm	≥80	120°	≥0.9	110-265V~	≤7	3200g
749-1053	400W	6500K	36000lm	≥80	120°	≥0.9	110-265V~	≤7	4000g
749-1059	600W	6500K	18000lm	≥80	120°	≥0.9	110-265V~	≤7	12000g



LED RECESSED DOWNLIGHT

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	SDCM	Dimension
750-7105	10W	6500K	700lm	≥70	60°-120°	≥0.5	110-265V~	≤7	Ø130*50mm
750-7106	10W	3000K	700lm	≥70	60°-120°	≥0.5	110-265V~	≤7	Ø130*50mm
750-7107	20W	6500K	1400lm	≥70	60°-120°	≥0.5	110-265V~	≤7	Ø190*50mm
750-7108	20W	3000K	1400lm	≥70	60°-120°	≥0.5	110-265V~	≤7	Ø190*50mm
750-7109	30W	6500K	2100lm	≥70	60°-120°	≥0.5	110-265V~	≤7	Ø220*50mm
750-7110	30W	3000K	2100lm	≥70	60°-120°	≥0.5	110-265V~	≤7	Ø220*50mm
750-7111	30W	4000K	2400lm	≥70	60°-120°	≥0.5	110-265V~	≤7	Ø220*50mm

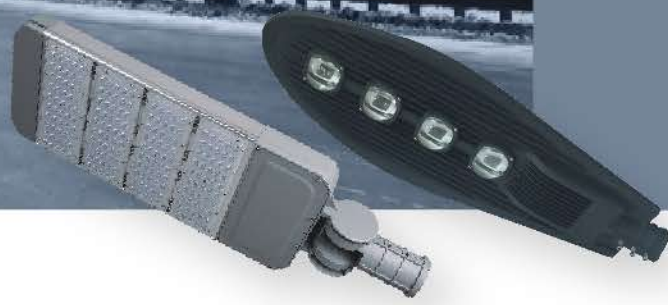

LED STREET LIGHT

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	SDCM	Weight
792-1000	100W	6500K	10000lm	≥80	90°-120°	≥0.9	110-265V~	≤7	6200g
792-1001	100W	3000K	10000lm	≥80	90°-120°	≥0.9	110-265V~	≤7	6200g
792-1002	150W	6500K	20000lm	≥80	90°-120°	≥0.9	110-265V~	≤7	7500g
792-1003	200W	6500K	30000lm	≥80	90°-120°	≥0.9	110-265V~	≤7	8700g

COB Type

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	SDCM	Weight
792-1004	100W	6500K	6000lm	≥80	90°-120°	≥0.9	110-265V~	≤7	2600g
792-1005	150W	6500K	8800lm	≥80	90°-120°	≥0.9	110-265V~	≤7	4500g
792-1006	200W	6500K	12000lm	≥80	90°-120°	≥0.9	110-265V~	≤7	5100g



T8 BATTEN FIXTURE

Item Code	Dimension
741-2201	50*65*620mm (2FT)
741-2202	50*65*1220mm (4FT)



LED GRILL PANEL LIGHT - 60X60cm

Item Code	Wattage	CCT	Lumen	CRI	Beam Angle	Power Factor	Voltage	SDCM	Dimension
750-1616	96W	6500K	7500lm	≥70	90°	≥0.5	185-265V~	≤7	595*595*25mm
750-1617	96W	3000K	7500lm	≥70	90°	≥0.5	185-265V~	≤7	595*595*25mm
750-1620	40W	6500K	2800lm	≥70	90°	≥0.5	185-265V~	≤7	595*595*25mm



FRAME FOR LED PANEL LIGHT - 60X60cm

Item Code	Dimension
741-2401	600*600mm

OREL



Orel Regional Offices



Export Distributor Points

We are in **27 countries**,
employing **3685 personnel**,
empowering **59000 business partners**
across **6 continents**



OUR REGIONAL HEADQUARTERS

ASIA

OREL South East Asia

7, Gambas Crescent, #01-25 ARK @ Gambas,
Singapore 757087.

Phone: +65 6970 5547 E-Mail: sea@orelcorp.com

OREL South Asia

A 74 FIEE Complex, OKHLA Industrial Area – Phase 2,
New Delhi – 110020, India.

Phone: +91 114 106 9843 E-Mail: sa@orelcorp.com

OREL Corporation

No.49, Sri Jinarathana Road, Colombo 02, Sri Lanka.

Phone: +94 114 792 100 | 166 E-Mail: sl@orelcorp.com

North America

OREL North America

16192 Coastal Highway, Lewes, DE 19958,
County of Sussex, U.S.A.

Phone: +13 059 447 710 E-Mail: usa@orelcorp.com

Middle East

OREL Middle East FZC

503 Business Point 1, Port Saeed, Deira,
Dubai, U.A.E.

Phone: +971 4388 8722 E-Mail: me@orelcorp.com