




Experience lighting in a whole new light.
Indoor Lighting Catalogue

35 SBU's Converge into Four Verticles to Create one Super Power

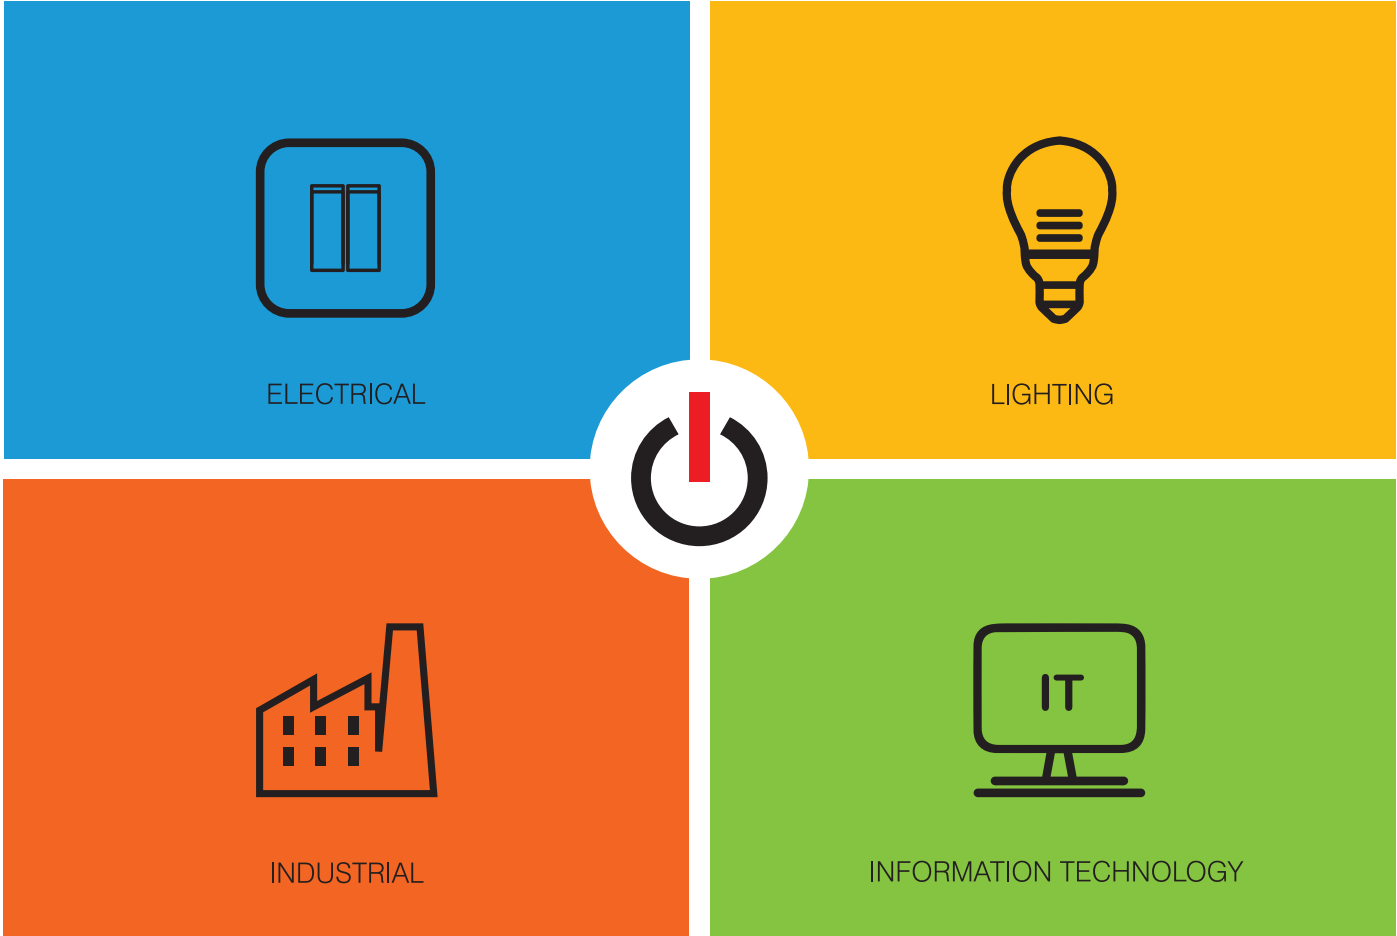


About us	<p>Our Vision "To create a billion dollar global electrical brand"</p>	<p>Our Mission "To add more to life with electricity"</p> <p>At Orel Corporation, the makers of Orange Electric, we believe that more can be added to life with electricity. We put together the best human ingenuity with the world's leading technology to solve your toughest challenges with electricity and to save energy. Today, we are lighting up one country at a time. We are not just dreaming about it. With every passing day, we make it happen. One day soon, we will switch on the world.</p>	
	<p>Credo No matter how lucrative it may sound, we shall never engage in businesses that deals in arms and ammunition, alcohol and tobacco, livestock, gambling or any other business that undermines one's social values.</p>		<p>Core Values Never give up, have lots of energy, be patient, always tell the truth, learn to let go for the greater good, cultivate the highest moral values, be kind, be generous, develop equanimity and believe that ultimate learning comes from one's own experiences.</p>
	<p>Our Culture At Orange Electric, we value innovation and technology. But we place a higher values in making our people better human beings. Good old fashioned values like being simple, honest and straight forward will take you a long way with us.</p>		



Ceiling Recess Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	0.6	1733
2	1.2	433
3	1.8	193
4	2.4	108
5	3.0	17

V 37V	IP 54	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2200	10W	604 lm	3000K	33°	Fixed	Ø83mm	Ø90x67mm	White



Ceiling Recess Directional Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	0.6	1743
2	1.2	436
3	1.8	194
4	2.4	109
5	3	17

V 37V	IP 20	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2210	10W	604 lm	3000K	28°	30	Ø83mm	Ø90x83mm	White



Ceiling Recess Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	0.6	1500
2	1.2	375
3	1.8	167
4	2.4	94
5	3	15

V 37V	IP 20	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2112	10W	630 lm	3000K	36°	Fixed	Ø83mm	Ø90x72mm	White



Ceiling Recess Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	1.1	486
2	2.2	122
3	3.3	54
4	4.4	30
5	5.5	5

V 36V	IP 44	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2100	6W	530 lm	3000K	36°	Fixed	Ø68mm	Ø80*H43mm	White



Ceiling Recess Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



V 36V	IP 44	CRI ≥80	Clear	LED	PF ≥0.9
-----------------	-----------------	-------------------	-------	-----	-------------------

h(m)	D(m)	Em(lx)	10W
1	1	482	
2	2	121	
3	3	54	
4	4	30	
5	5	5	

h(m)	D(m)	Em(lx)	15W
1	1	770	
2	2	193	
3	3	86	
4	4	48	
5	5	8	

h(m)	D(m)	Em(lx)	20W
1	1	1047	
2	2	262	
3	3	116	
4	4	65	
5	5	10	


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2102	10W	800 lm	3000K	50°	Fixed	Φ105mm	Φ115*H98mm	White
760-2104	15W	1400 lm	3000K	50°	Fixed	Φ105mm	Φ115*H98mm	White
760-2106	20W	1900 lm	3000K	50°	Fixed	Φ105mm	Φ115*H98mm	White



Ceiling Recess Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	1.1	486
2	2.2	122
3	3.3	54
4	4.4	30
5	5.5	5

V 36V	IP 44	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2600	6W	530 lm	3000K	36°	Fixed	Φ68mm	Φ80*80*43mm	White



Ceiling Recess Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	1.1	203
2	2.2	51
3	3.3	25
4	4.4	13
5	5.5	2

V 36V	IP 44	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2602	10W	900 lm	3000K	60°	Fixed	Φ68mm	Φ80*80*74mm	White



Ceiling Recess Directional Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



V 36V	IP 44	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------

h(m)	D(m)	Em(lx)	15W
1	1	328	
2	2	82	
3	3	36	
4	4	21	
5	5	3	

h(m)	D(m)	Em(lx)	20W
1	1	452	
2	2	113	
3	3	50	
4	4	28	
5	5	5	


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2108	15W	1300 lm	3000K	60°	30	Φ137mm	Φ150*130mm	White
760-2110	20W	1700 lm	3000K	60°	30	Φ137mm	Φ150*130mm	White



Ceiling Recess Directional Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



V 37V	IP 20	CRI ≥80	Clear	LED	PF ≥0.9
-----------------	-----------------	-------------------	-------	-----	-------------------

h(m)	D(m)	Em(lx)	1x7W
1	0.6	1364	
2	1.2	341	
3	1.8	152	
4	2.4	85	
5	3	14	

h(m)	D(m)	Em(lx)	2x7W
1	0.6	2739	
2	1.2	685	
3	1.8	304	
4	2.4	171	
5	3	27	

h(m)	D(m)	Em(lx)	3x7W
1	0.6	4092	
2	1.2	1023	
3	1.8	455	
4	2.4	256	
5	3	41	


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2622	1x7W	560 lm	3000K	15°	30	Ø83mm	92*92*55	AW
760-2624	2x7W	1120 lm	3000K	15°	30	Ø83*2mm	172*92*55	AW
760-2626	3x7W	1680 lm	3000K	15°	30	Ø83*3mm	252*92*55	AW



Ceiling Recess Directional Downlight

- Housing : Sheet steel
- Mounting Kit : Cast aluminium
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	1.1	118
2	2.2	30
3	3.3	13
4	4.4	7
5	5.5	1

V 36V	IP 44	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2604	1x6W	600 lm	3000K	60°	45	104*104mm	110*110*87mm	Black



Ceiling Recess Directional Downlight

- Housing : Sheet steel
- Mounting Kit : Cast aluminium
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	1.1	118
2	2.2	30
3	3.3	13
4	4.4	7
5	5.5	1

V 36V	IP 44	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2606	2x6W	1200 lm	3000K	60°	45	209*104mm	215*110*87mm	Black



Ceiling Recess Directional Downlight

- Housing : Sheet steel
- Mounting Kit : Cast aluminium
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	1.1	118
2	2.2	30
3	3.3	13
4	4.4	7
5	5.5	1

V 36V	IP 44	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2608	3x6W	1800 lm	3000K	60°	45	301*104mm	307*110*87mm	Black



Ceiling Recess Directional Downlight

- Housing : Sheet steel
- Mounting Kit : Cast aluminium
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	1.1	183
2	2.2	46
3	3.3	20
4	4.4	11
5	5.5	2

V 36V	IP 20	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------

Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2610	1x10W	1000 lm	3000K	60°	45	104*104mm	110*110*87mm	Black



Ceiling Recess Directional Downlight

- Housing : Sheet steel
- Mounting Kit : Cast aluminium
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	1.1	183
2	2.2	46
3	3.3	20
4	4.4	11
5	5.5	2

V 36V	IP 20	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2612	2x10W	2000 lm	3000K	60°	45	209*104mm	215*110*87mm	Black



Ceiling Recess Directional Downlight

- Housing : Sheet steel
- Mounting Kit : Cast aluminium
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	1.1	183
2	2.2	46
3	3.3	20
4	4.4	11
5	5.5	2

V 36V	IP 20	CRI ≥80	Clear	LED	PF ≥0.9
-----------------	-----------------	-------------------	-------	-----	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2614	3x10W	3000 lm	3000K	60°	45	301*104mm	307*110*87mm	Black



Ceiling Recess Directional Downlight

- Housing : Sheet steel
- Mounting Kit : Cast aluminium
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	1.1	264
2	2.2	66
3	3.3	29
4	4.4	17
5	5.5	3

V 36V	IP 20	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2616	1x15W	1400 lm	3000K	60°	45	104*104mm	110*110*87mm	Black



Ceiling Recess Directional Downlight

- Housing : Sheet steel
- Mounting Kit : Cast aluminium
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	1.1	264
2	2.2	66
3	3.3	29
4	4.4	17
5	5.5	3

V 36V	IP 20	CRI ≥80	Clear	LED	PF ≥0.9
-----------------	-----------------	-------------------	-------	-----	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2618	2x15W	2800 lm	3000K	60°	45	209*104mm	215*110*87mm	Black



Ceiling Recess Directional Downlight

- Housing : Sheet steel
- Mounting Kit : Cast aluminium
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	1.1	264
2	2.2	66
3	3.3	29
4	4.4	17
5	5.5	3

V 36V	IP 20	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-2620	3x15W	4200 lm	3000K	60°	45	301*104mm	307*110*87mm	Black



Ceiling Recess Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	0.6	58
2	1.2	15
3	1.8	6
4	2.4	4
5	3	1

V 37V	IP 65	CRI ≥80	 Clear	 LED	PF ≥0.5
-----------------	-----------------	-------------------	--	--	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-8110	7W	540lm	3000K	45°	25	Φ75mm	Φ85*40mm	White
760-8112	7W	540lm	3000K	45°	25	Φ75mm	Φ85*40mm	Black



Ceiling Recess Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)	10W
1	1.5	181	
2	3	45	
3	4.5	20	
4	6	11	
5	7.5	2	

h(m)	D(m)	Em(lx)	15W
1	1.5	295	
2	3	74	
3	4.5	33	
4	6	18	
5	7.5	3	

h(m)	D(m)	Em(lx)	20W
1	1.5	401	
2	3	100	
3	4.5	45	
4	6	25	
5	7.5	4	

V 36V	IP 44	CRI ≥80	Opal	LED	PF ≥0.9
-----------------	-----------------	-------------------	-------------	------------	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-8114	10W	700lm	3000K	75°	Fixed	Φ105mm	Φ115*H98mm	White
760-8116	15W	1100lm	3000K	75°	Fixed	Φ105mm	Φ115*H98mm	White
760-8118	20W	1600lm	3000K	75°	Fixed	Φ105mm	Φ115*H98mm	White



Ceiling Recess Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	1.5	454
2	3	114
3	4.5	50
4	6	24
5	7.5	5




Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-8120	25W	1800lm	3000K	75°	Fixed	Φ105mm	ø115*98	White



Ceiling Recess Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



V 37V	IP 20	CRI ≥80	Clear	LED	PF ≥0.9
-----------------	-----------------	-------------------	-------	-----	-------------------

h(m)	D(m)	Em(lx)	15W
1	0.4	3359	
2	0.8	840	
3	1.2	373	
4	1.6	210	
5	2	34	

h(m)	D(m)	Em(lx)	20W
1	0.4	2400	
2	0.8	600	
3	1.2	267	
4	1.6	150	
5	2	24	

h(m)	D(m)	Em(lx)	30W
1	0.4	7343	
2	0.8	1836	
3	1.2	816	
4	1.6	459	
5	2	73	


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-8122	15W	992lm	3000K	24°	Fixed	Φ110mm	ø119*135	AW
760-8124	15W	992lm	3000K	24°	Fixed	Φ110mm	ø119*135	AS
760-8126	20W	1183lm	3000K	24°	Fixed	Φ110mm	ø119*135	AW
760-8128	20W	1183lm	3000K	24°	Fixed	Φ110mm	ø119*135	AS
760-8130	30W	2023lm	3000K	24°	Fixed	Φ110mm	ø119*135	AW
760-8132	30W	2023lm	3000K	24°	Fixed	Φ110mm	ø119*135	AS



Ceiling Recess Directional Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



h(m)	D(m)	Em(lx)
1	1.5	454
2	3	114
3	4.5	50
4	6	28
5	7.5	5

V 37V	IP 20	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-9100	15W	1200lm	3000K	24°	25	ø110mm	ø119*135	AW
760-9102	15W	1200lm	3000K	24°	25	ø110mm	ø119*135	AS
760-9104	20W	1600lm	3000K	24°	25	ø110mm	ø119*135	AW
760-9106	20W	1600lm	3000K	24°	25	ø110mm	ø119*135	AS
760-9108	30W	2200lm	3000K	24°	25	ø110mm	ø119*135	AW
760-9110	30W	2200lm	3000K	24°	25	ø110mm	ø119*135	AS



Ceiling Recess Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



V 36V	IP 44	CRI ≥80	Clear	LED	PF ≥0.9
-----------------	-----------------	-------------------	-------	-----	-------------------

h(m)	D(m)	Em(lx)	6W
1	1.1	118	
2	2.2	30	
3	3.3	13	
4	4.4	7	
5	5.5	1	

h(m)	D(m)	Em(lx)	10W
1	1.1	183	
2	2.2	46	
3	3.3	20	
4	4.4	11	
5	5.5	2	

h(m)	D(m)	Em(lx)	15W
1	1.1	264	
2	2.2	66	
3	3.3	29	
4	4.4	17	
5	5.5	3	


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-8100	6W	600lm	3000K	60°	Fixed	Φ70mm	Φ82*H47mm	White
760-8101	6W	600lm	4000K	60°	Fixed	Φ70mm	Φ82*H47mm	White
760-8102	10W	950lm	3000K	60°	Fixed	Φ70mm	Φ82*H67mm	White
760-8103	10W	950lm	4000K	60°	Fixed	Φ70mm	Φ82*H47mm	White
760-8104	15W	1400lm	3000K	60°	Fixed	Φ70mm	Φ82*H47mm	White
760-8105	15W	1400lm	4000K	60°	Fixed	Φ70mm	Φ82*H67mm	White



Ceiling Recess Directional Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



V 42V	IP 44	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------

h(m)	D(m)	Em(lx)	6W
1	0.6	271	
2	1.2	68	
3	1.8	30	
4	2.4	17	
5	3	3	

h(m)	D(m)	Em(lx)	10W
1	0.6	427	
2	1.2	107	
3	1.8	47	
4	2.4	27	
5	3	4	

h(m)	D(m)	Em(lx)	15W
1	0.6	623	
2	1.2	156	
3	1.8	69	
4	2.4	39	
5	3	6	


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-3100	6W	400lm	2700K	36°	30°	Ø83mm	ø90*78	White
760-3102	10W	600lm	2700K	36°	30°	Ø83mm	ø90*78	White
760-3104	15W	900lm	2700K	36°	30°	Ø83mm	ø90*78	White



Ceiling Recess Directional Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : External electronic driver



V 42V	IP 44	CRI ≥80	Clear	LED	PF ≥0.9
-----------------	-----------------	-------------------	-------	-----	-------------------

h(m)	D(m)	Em(lx)	6W
1	0.6	271	
2	1.2	68	
3	1.8	30	
4	2.4	17	
5	3	3	

h(m)	D(m)	Em(lx)	10W
1	0.6	427	
2	1.2	107	
3	1.8	47	
4	2.4	27	
5	3	4	

h(m)	D(m)	Em(lx)	15W
1	0.6	623	
2	1.2	156	
3	1.8	69	
4	2.4	39	
5	3	6	


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-3101	6W	400lm	4000K	36°	0-30°	Ø83mm	ø90*78	White
760-3103	10W	600lm	4000K	36°	0-30°	Ø83mm	ø90*78	White
760-3105	15W	900lm	4000K	36°	0-30°	Ø83mm	ø90*78	White



Ceiling Surface Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : Internal electronic driver



h(m)	D(m)	Em(lx)	12W
1	0.4	1764	
2	0.8	441	
3	1.2	196	
4	1.6	110	
5	2	18	

V 42V	IP 20	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------

h(m)	D(m)	Em(lx)	18W
1	0.4	3762	
2	0.8	941	
3	1.2	418	
4	1.6	235	
5	2	38	


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-4100	12W	945lm	3000K	24°	Fixed	-	Φ119*115.5mm	White
760-4101	12W	945lm	5000K	35°	Fixed	-	Φ119*115.5mm	White
760-4102	18W	1490lm	3000K	24°	Fixed	-	Φ134*121mm	White
760-4103	18W	1490lm	5000K	35°	Fixed	-	Φ134*121mm	White
760-4104	12W	945lm	3000K	24°	Fixed	-	Φ119*115.5mm	Black
760-4105	12W	945lm	5000K	35°	Fixed	-	Φ119*115.5mm	Black
760-4106	18W	1490lm	3000K	24°	Fixed	-	Φ134*121mm	Black
760-4107	18W	1490lm	5000K	35°	Fixed	-	Φ134*121mm	Black



Ceiling Surface Downlight

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : Internal electronic driver



h(m)	D(m)	Em(lx)	12W
1	0.4	2455	
2	0.8	614	
3	1.2	274	
4	1.6	153	
5	2	25	



h(m)	D(m)	Em(lx)	18W
1	0.4	3877	
2	0.8	969	
3	1.3	431	
4	1.6	242	
5	2	39	


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-4600	12W	1000lm	3000K	24°	Fixed	-	76*76*100mm	White
760-4601	12W	1000lm	5000K	35°	Fixed	-	76*76*100mm	White
760-4602	18W	1480lm	3000K	24°	Fixed	-	100*100*100mm	White
760-4603	18W	1480lm	5000K	35°	Fixed	-	100*100*100mm	White
760-4604	12W	1000lm	3000K	24°	Fixed	-	76*76*100mm	Black
760-4605	12W	1000lm	5000K	35°	Fixed	-	76*76*100mm	Black
760-4606	18W	1480lm	3000K	24°	Fixed	-	100*100*100mm	Black
760-4607	18W	1480lm	5000K	35°	Fixed	-	100*100*100mm	Black



Ceiling Suspended Downlight

- Housing : Aluminium
- Reflector : Antiglare aluminium reflector
- Driver : Internal electronic driver



h(m)	D(m)	Em(lx)	15W
1	0.7	493	
2	1.4	123	
3	2.1	55	
4	2.8	31	
5	3.5	5	



h(m)	D(m)	Em(lx)	20W
1	0.7	679	
2	1.4	170	
3	2.1	75	
4	2.8	42	
5	3.5	7	


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-0600	15W	1400lm	2700K	36°	0-25	-	W120*H152mm	White
760-0604	20W	2000lm	2700K	36°	0-25	-	W120*H152mm	White
760-0602	15W	1400lm	2700K	36°	0-25	-	W120*H152mm	Black
760-0606	20W	2000lm	2700K	36°	0-25	-	W120*H152mm	Black
760-0601	15W	1400lm	4000K	36°	0-25	-	W120*H152mm	White
760-0605	20W	2000lm	4000K	36°	0-25	-	W120*H152mm	White
760-0603	15W	1400lm	4000K	36°	0-25	-	W120*H152mm	Black
760-0607	20W	2000lm	4000K	36°	0-25	-	W120*H152mm	Black



Ceiling Suspended Downlight

- Housing : Aluminium
- Reflector : Antiglare aluminium reflector
- Driver : Internal electronic driver



h(m)	D(m)	Em(lx)	15W
1	0.7	493	
2	1.4	123	
3	2.1	55	
4	2.8	31	
5	3.5	5	

V 36V	IP 20	CRI ≥80	 Clear	 LED	PF ≥0.9
-----------------	-----------------	-------------------	--	--	-------------------

h(m)	D(m)	Em(lx)	20W
1	0.7	679	
2	1.4	170	
3	2.1	75	
4	2.8	42	
5	3.5	7	


Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
760-0100	15W	1400lm	2700K	36°	0-25	-	Φ125*L152mm	White
760-0104	20W	2000lm	2700K	36°	0-25	-	Φ125*L152mm	White
760-0102	15W	1400lm	2700K	36°	0-25	-	Φ125*L152mm	Black
760-0106	20W	2000lm	2700K	36°	0-25	-	Φ125*L152mm	Black
760-0101	15W	1400lm	4000K	36°	0-25	-	Φ125*L152mm	White
760-0105	20W	2000lm	4000K	36°	0-25	-	Φ125*L152mm	White
760-0103	15W	1400lm	4000K	36°	0-25	-	Φ125*L152mm	Black
760-0107	20W	2000lm	4000K	36°	0-25	-	Φ125*L152mm	Black



Track Spot Light

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : Internal electronic driver



V 36V	IP 20	CRI ≥80	Clear	LED	PF ≥0.9
-----------------	-----------------	-------------------	-------	-----	-------------------

h(m)	D(m)	Em(lx)	15W
1	0.7	489	
2	1.4	122	
3	2.1	54	
4	2.8	31	
5	3.5	5	

h(m)	D(m)	Em(lx)	20W
1	0.7	2696	
2	1.4	674	
3	2.1	300	
4	2.8	169	
5	3.5	27	

h(m)	D(m)	Em(lx)	25W
1	0.7	2997	
2	1.4	749	
3	2.1	333	
4	2.8	187	
5	3.5	30	

Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
762-0018	15W	1100lm	3000K	36°	0-90	-	Φ122*146mm	White
762-0020	20W	1500lm	3000K	36°	0-90	-	Φ122*146mm	White
762-0022	25W	1700lm	3000K	36°	0-90	-	Φ122*146mm	White
762-0024	15W	1100lm	3000K	36°	0-90	-	Φ122*146mm	Black
762-0026	20W	1500lm	3000K	36°	0-90	-	Φ122*146mm	Black
762-0028	25W	1700lm	3000K	36°	0-90	-	Φ122*146mm	Black



Track Spot Light

- Housing : Die cast aluminium with heat sink
- Reflector : Antiglare aluminium reflector
- Driver : Internal electronic driver



15W

h(m)	D(m)	Em(lx)
1	0.6	2414
2	1.2	604
3	1.8	268
4	2.4	151
5	3	24

30W

h(m)	D(m)	Em(lx)
1	0.6	4846
2	1.2	1212
3	1.8	538
4	2.4	303
5	3	48

20W

h(m)	D(m)	Em(lx)
1	0.6	3010
2	1.2	753
3	1.8	334
4	2.4	188
5	3	30

40W

h(m)	D(m)	Em(lx)
1	0.6	5812
2	1.2	1453
3	1.8	646
4	2.4	363
5	3	58



Specification

Model No	Power	Lumens	CCT	Beam Angle	Tilt Degree	Cut-Out	Dimensions	Finish
762-0002	15W	1200lm	3000K	36°	0-90	-	Φ68*102	White
762-0004	20W	1500lm	3000K	36°	0-90	-	Φ68*102	White
762-0006	30W	2600lm	3000K	30°	0-90	-	Φ100*145	White
762-0008	40W	3000lm	3000K	30°	0-90	-	Φ100*145	White
762-0010	15W	1200lm	3000K	36°	0-90	-	Φ68*102	Black
762-0012	20W	1500lm	3000K	36°	0-90	-	Φ68*102	Black
762-0014	30W	2600lm	3000K	30°	0-90	-	Φ100*145	Black
762-0016	40W	3000lm	3000K	30°	0-90	-	Φ100*145	Black

- Body : Extruded aluminium

3-Circuit Surface Mounted Track






Track is made of pure aluminum and moulded through extrusion, with white or black powder coating. Four copper conductors and insulation material are inside. Large number of connectors are available, almost all connectors can be used for electrical power supply. The circuits can be designed with one switch controlling each circuit on the track respectively as required. The track can be mounted on the ceiling or walls; it




can also be suspended using pendant tubes or wire ropes. Track is available in lengths up to 3M. when connected to a three-phase network, each of the three circuits can be loaded to a maximum of 16A. each copper conductors are separately protected by isolation material to avoid the interfering from each other. The lamps mounted on each track shall not exceeded its rated load.

1M Track
780-1000 - White
780-1001 - Black

3M Track
780-1002- White
780-1003 - Black

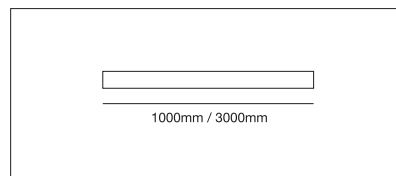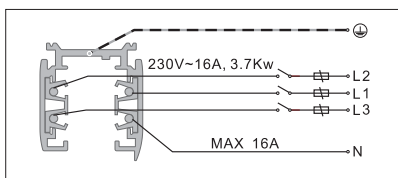


Line end



780-1010 - White
780-1011 - Black

Live-end connector to start a run.
Weight 0.05Kg


End up

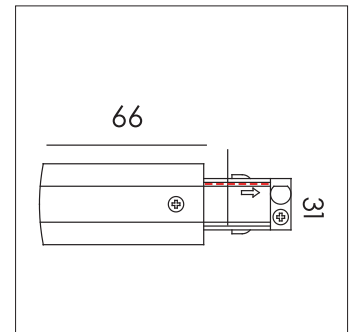

780-1012 - White
780-1013 - Black

Live-end connector to start a run.
Weight 0.05Kg


Line end



780-1020 - White
780-1021 - Black

End cap connector
To the track section end
Weight 0.01Kg


Straight Connector



780-1030 - White
780-1031 - Black

End cap connector
To the track section end
Weight 0.01Kg


L connector



780-1042 - White
780-1043 - Black

"L" connector
To connect two track section at a 90° angle
Weight 0.11Kg


L Connector



780-1040 - White
780-1041 - Black

"L"connector
To connect two track section at a 90° angle
Weight 0.11Kg



T connector



780-1050 - White
780-1051 - Black

“T” connector
To connect three track
section into a T configuration
Weight 0.11Kg



T Connector

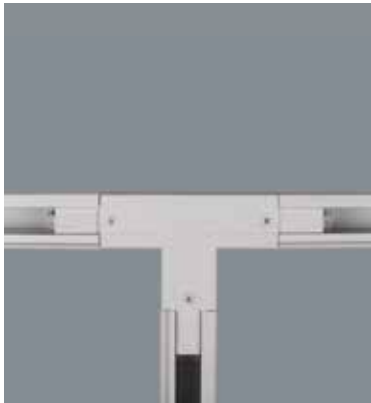

780-1060 - White
780-1061 - Black

“T” connector
To connect three track
section into a T configuration
Weight 0.16Kg

X connector

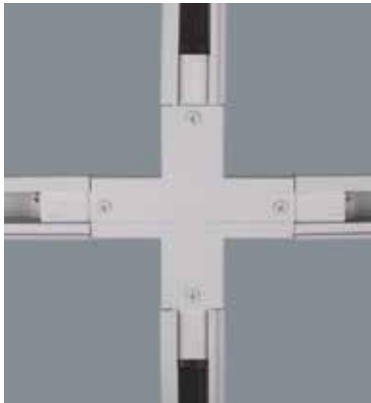

780-1070 - White
780-1071 - Black

“+” connector
To connect four track
section into a cross configuration
Weight 0.22Kg

Suspension Kit



780-1080 - White
780-1081 - Black

Suspension Kit with 1.5m wire
Weight 0.08Kg

Contact us.

OREL UK

4th Floor,
7/10, Chandos Street,
London,
W1G 9DQ,
United Kingdom.
T: +44 20 358 22933
E: UK@orelcorp.com

OREL USA

21515 Hawthorn Blvd
Suite 200, Torrance
CA 90503
U.S.A.
General :+ 424 337 1898
Fax :+ 424 201 2201
Email: USA@orelcorp.com

OREL Asia Pacific

8, Port Kembla Drive,
Bibra Lake,
WA 6163, Perth,
Australia.
T: +61 89202800
E: APAC@orelcorp.com

OREL Middle East

Shop No.3, Riviera Hotel Building,
Deira, Dubai,
United Arab Emirates.
T: +97 155 424 2722
+97 142 972 636
E: ME@orelcorp.com

OREL South Asia

A 74 FIEE,
OKHLA Industrial Area - Phase II,
New Delhi - 110020,
India.
T: +91 114 106 9843
E: SA@orelcorp.com

OREL South East Asia

72, Eunost Avenue 7,
#06 - 03,
Singapore Handicrafts Building,
Singapore 409570.
T: +65 6365 4620
E: FE@orelcorp.com



OREL CORPORATION (HQ)

49, Sri Jinarathana Road, Colombo 2, Sri Lanka. T : +94 114 792 100 | E : hq@orelcorp.com



4 792056 234244

May 2017