


35+ SBU's Converged into Four Verticles to Create one Super Power



About us	<p>Our Vision "To Create a billion dollar global electrical brand"</p>	<p>Our Mission "To add more to life with electricity"</p> <p>At OREL CORPORATION, the makers of Orange Electric, we believe that more can be added to life with electricity. We put together the best human ingenuity with the world's leading technology to solve your toughest challenges with electricity and to save energy. Today, we are lighting up one country at a time. We are not just dreaming about it. With every passing day, we make it happen. So one day, we will switch on the world.</p>
	<p>Credo No matter how lucrative it may sound, we shall never engage in businesses that deals in arms and ammunition, alcohol and tobacco, livestock, gambling or any other business that undermines one's social values.</p>	
	<p>Our Culture At Orange Electric, we value innovation and technology, but we value, in making our people to be better human beings, even more. Good old fashioned values like being simple, honest and straight forward will take you a long way with us.</p>	

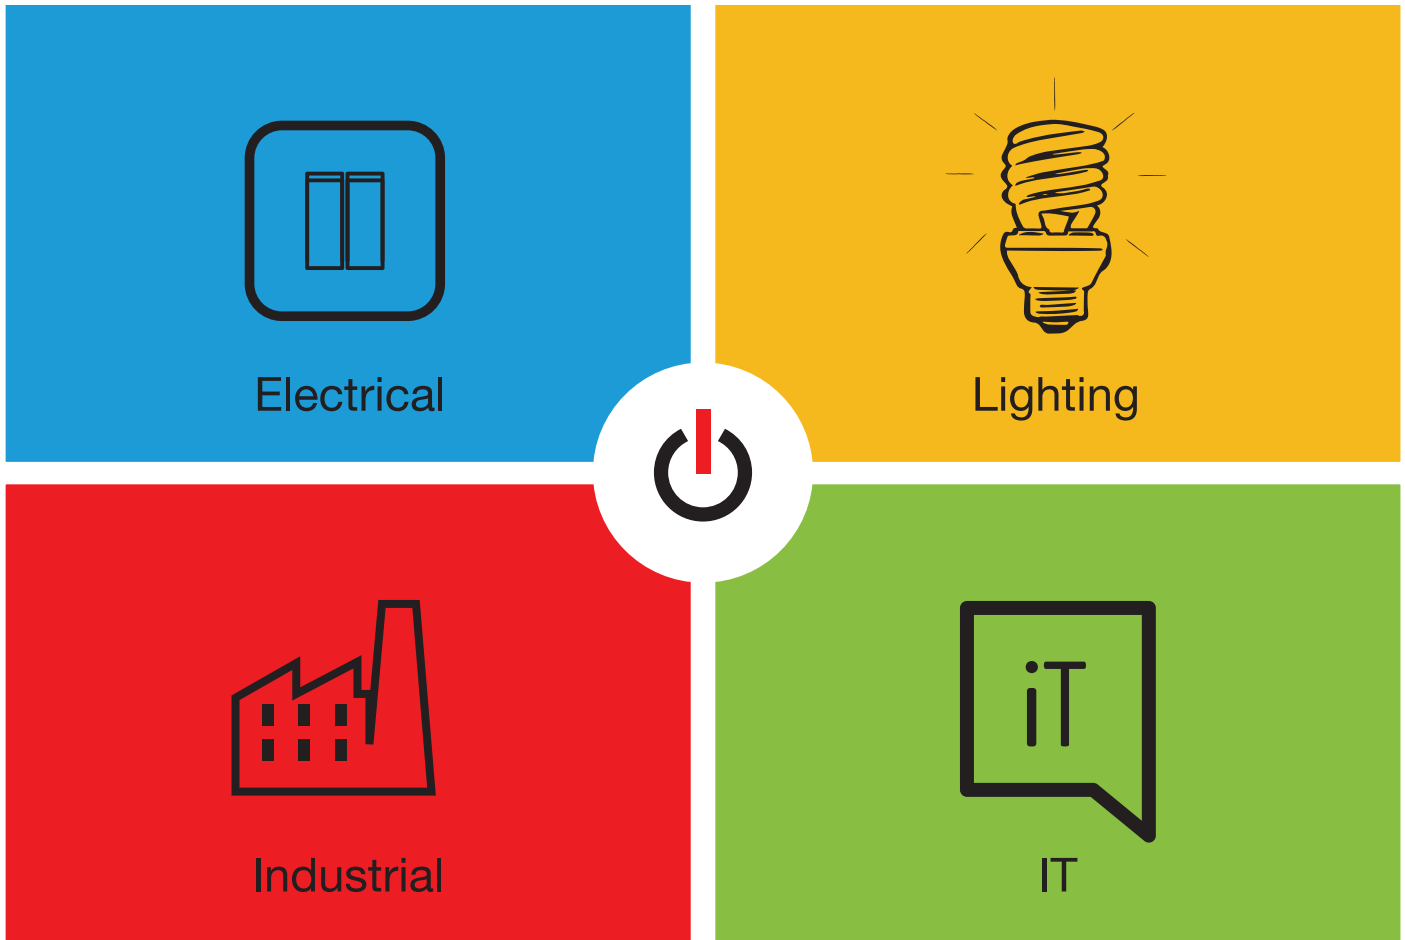

LAMPS

LED LAMP - ECO LED



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Lamp Base	Dimension (mm)
724-1007	3.5	6500	180°	280	160-240	B22	Ø45*H86
724-1008	3.5	3000	180°	270	160-240	B22	Ø45*H86
724-1011	5	6500	220°	450	160-240	B22	Ø50*H87
724-1012	5	3000	220°	420	160-240	B22	Ø50*H87
724-1015	7	6500	220°	650	160-240	B22	Ø60*H108
724-1016	7	3000	220°	600	160-240	B22	Ø60*H108
724-1019	9	6500	220°	850	160-240	B22	Ø60*H108
724-1020	9	3000	220°	800	160-240	B22	Ø60*H108
724-1027	12.5	6500	220°	1200	160-240	B22	Ø70*H135
724-1028	12.5	3000	220°	1100	160-240	B22	Ø70*H135
724-2007	3.5	6500	180°	280	160-240	E27	Ø45*H88
724-2008	3.5	3000	180°	270	160-240	E27	Ø45*H88
724-2011	5	6500	220°	450	160-240	E27	Ø50*H89
724-2012	5	3000	220°	420	160-240	E27	Ø50*H89
724-2015	7	6500	220°	650	160-240	E27	Ø60*H110
724-2016	7	3000	220°	600	160-240	E27	Ø60*H110
724-2019	9	6500	220°	850	160-240	E27	Ø60*H110
724-2020	9	3000	220°	800	160-240	E27	Ø60*H110
724-2027	12.5	6500	220°	1200	160-240	E27	Ø70*H137
724-2028	12.5	3000	220°	1100	160-240	E27	Ø70*H137



LED LAMP - CANDLE CLEAR



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Lamp Base	Dimension (mm)
728-1003	3	6500	260°	260	160-240	B22	Ø35*H100
728-1004	3	2700	260°	230	160-240	B22	Ø35*H100
728-1007	5	6500	260°	390	160-240	B22	Ø38*H108
728-1008	5	2700	260°	350	160-240	B22	Ø38*H108
728-2003	3	6500	260°	260	160-240	E27	Ø35*H102
728-2004	3	2700	260°	230	160-240	E27	Ø35*H102
728-2007	5	6500	260°	390	160-240	E27	Ø38*H110
728-2008	5	2700	260°	350	160-240	E27	Ø38*H110
728-3003	3	6500	260°	260	160-240	E14	Ø35*H102
728-3004	3	2700	260°	230	160-240	E14	Ø35*H102
728-3007	5	6500	260°	390	160-240	E14	Ø38*H110
728-3008	5	2700	260°	350	160-240	E14	Ø38*H110



LED LAMP - CANDLE FROSTED



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Lamp Base	Dimension (mm)
728-1001	3	6500	260°	260	160-240	B22	Ø35*H100
728-1002	3	2700	260°	230	160-240	B22	Ø35*H100
728-1005	5	6500	260°	390	160-240	B22	Ø38*H108
728-1006	5	2700	260°	350	160-240	B22	Ø38*H108
728-2001	3	6500	260°	260	160-240	E27	Ø35*H102
728-2002	3	2700	260°	230	160-240	E27	Ø35*H102
728-2005	5	6500	260°	390	160-240	E27	Ø38*H110
728-2006	5	2700	260°	350	160-240	E27	Ø38*H110
728-3001	3	6500	260°	260	160-240	E14	Ø35*H102
728-3002	3	2700	260°	230	160-240	E14	Ø35*H102
728-3005	5	6500	260°	390	160-240	E14	Ø38*H110
728-3006	5	2700	260°	350	160-240	E14	Ø38*H110



LAMPS

LED LAMP - MR16 DC



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (DC)	Lamp Base	Dimension (mm)
728-5003	3	6500	36°	235	12	Gu 5.3	Ø50*H45
728-5004	3	3000	36°	220	12	Gu 5.3	Ø50*H45
728-5008	5	6500	36°	370	12	Gu 5.3	Ø50*H45
728-5007	5	3000	36°	360	12	Gu 5.3	Ø50*H45

LED LAMP - MR16 AC



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Lamp Base	Dimension (mm)
728-5001	3.2	6500	120°	280	160-240	Gu 5.3	Ø50*H45
728-5002	3.2	3000	120°	260	160-240	Gu 5.3	Ø50*H45
728-5005	5	6500	120°	470	160-240	Gu 5.3	Ø50*H45
728-5006	5	3000	120°	450	160-240	Gu 5.3	Ø50*H45

LED LAMP - GU10




Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Lamp Base	Dimension (mm)
728-6001	4	6500	36°	270	160-240	Gu 10	Ø50*H54
728-6002	4	3000	36°	265	160-240	Gu 10	Ø50*H54
728-6005	6	6500	36°	460	160-240	Gu 10	Ø50*H54
728-6006	6	3000	36°	440	160-240	Gu 10	Ø50*H54



LAMPS

RIGID LED STRIP - IP 20

Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	SMD Type	Dimension (mm)
734-1001	7	3000	120°	840	160-240	4104	1000*15*6
734-1002	7	4000	120°	910	160-240	4104	1000*15*6
734-1020	14	3000	120°	1680	160-240	4104	1000*15*6
734-1021	14	4000	120°	1820	160-240	4104	1000*15*6



RIGID LED STRIP - IP 65

Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	SMD Type	Dimension (mm)
734-2001	7	3000	120°	840	160-240	4104	1000*15*6
734-2002	7	4000	120°	910	160-240	4104	1000*15*6
734-2020	14	3000	120°	1680	160-240	4104	1000*15*6
734-2021	14	4000	120°	1820	160-240	4104	1000*15*6



LED LAMP - FILAMENT

Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Lamp Base	Dimension (mm)
736-1002	4	3000	Wide	480	160-240	B22	Ø60*H105
736-2002	4	3000	Wide	480	160-240	E27	Ø60*H107
736-1004	6	3000	Wide	800	160-240	B22	Ø60*H105
736-2004	6	3000	Wide	800	160-240	E27	Ø60*H107



LAMPS

FLEXIBLE LED STRIP - IP20



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	SMD Type	Dimension (mm)
734-3001	6W/m	3000	120°	300lm/m	160-240	2835	5000
734-3002	6W/m	4000	120°	300lm/m	160-240	2835	5000
734-3011	8W/m	3000	120°	450lm/m	160-240	5050	5000
734-3012	8W/m	4000	120°	450lm/m	160-240	5050	5000
734-3014	8W/m	RGB	120°	200lm/m	160-240	5050	5000
734-3021	11W/m	3000	120°	650lm/m	160-240	2835	5000
734-3022	11W/m	4000	120°	650lm/m	160-240	2835	5000

FLEXIBLE LED STRIP - IP65



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	SMD Type	Dimension (mm)
734-4001	6W/m	3000	120°	300lm/m	160-240	2835	5000
734-4002	6W/m	4000	120°	300lm/m	160-240	2835	5000
734-4011	8W/m	3000	120°	450lm/m	160-240	5050	5000
734-4012	8W/m	4000	120°	450lm/m	160-240	5050	5000
734-4014	8W/m	RGB	120°	200lm/m	160-240	5050	5000
734-4021	11W/m	3000	120°	650lm/m	160-240	2835	5000
734-4022	11W/m	4000	120°	650lm/m	160-240	2835	5000



LAMPS

HIGH POWER LED



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Lamp Base	Dimension (mm)
726-1007	20	6500	270°	1900	160-240	B22	Φ80*H152
726-1008	20	3000	270°	1700	160-240	B22	Φ80*H152
726-1017	30	6500	270°	2800	160-240	B22	Φ100*H185
726-1018	30	3000	270°	2500	160-240	B22	Φ100*H185
726-1027	40	6500	270°	3700	160-240	B22	Φ118*H220
726-1028	40	3000	270°	3300	160-240	B22	Φ118*H220
726-1043	50	6500	270°	4700	160-240	B22	Φ135*H252
726-1044	50	3000	270°	4200	160-240	B22	Φ135*H252
726-2007	20	6500	270°	1900	160-240	E27	Φ80*H152
726-2008	20	3000	270°	1700	160-240	E27	Φ80*H152
726-2017	30	6500	270°	2800	160-240	E27	Φ100*H185
726-2018	30	3000	270°	2500	160-240	E27	Φ100*H185
726-1027	40	6500	270°	3700	160-240	B22	Φ118*H220
726-1028	40	3000	270°	3300	160-240	B22	Φ118*H220
726-1043	50	6500	270°	4700	160-240	B22	Φ135*H252
726-1044	50	3000	270°	4200	160-240	B22	Φ135*H252
726-4059	90	5700	140°	9000	160-240	E40	Φ180*H324
726-4060	90	2700	140°	8700	160-240	E40	Φ180*H324



HIGH POWER LED



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Lamp Base	Dimension (mm)
726-4247	60	6500	120°	5850	160-240	E40	Ø120*H305
726-4248	60	3000	120°	5400	160-240	E40	Ø120*H305



INDOOR LIGHTS

CEILING RECESS FLAT CIRCULAR PANEL LIGHT



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Cut Out (mm)	Dimension (mm)
720-1101	6	6500	120°	380	160-240	Ø105	Ø120
720-1102	6	3000	120°	350	160-240	Ø105	Ø120
720-1103	12	6500	120°	900	160-240	Ø155	Ø170
720-1104	12	3000	120°	800	160-240	Ø155	Ø170
720-1105	18	6500	120°	1600	160-240	Ø205	Ø225
720-1106	18	3000	120°	1400	160-240	Ø205	Ø225

CEILING RECESS FLAT SQUARE PANEL LIGHT



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Cut Out (Ømm)	Dimension (mm)
720-1601	6	6500	120°	380	160-240	105*105	120*120
720-1602	6	3000	120°	350	160-240	105*105	120*120
720-1603	12	6500	120°	900	160-240	155*155	170*170
720-1604	12	3000	120°	800	160-240	155*155	170*170
720-1605	18	6500	120°	1600	160-240	205*205	225*225
720-1606	18	3000	120°	1400	160-240	205*205	225*225



INDOOR LIGHTS

CEILING SURFACE MOUNTED SQUARE PANEL LIGHT



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Dimension (mm)
720-4601	6	6500	120°	380	160-240	120*120*35
720-4602	6	3000	120°	350	160-240	120*120*35
720-4603	12	6500	120°	900	160-240	170*170*35
720-4604	12	3000	120°	800	160-240	170*170*35
720-4605	18	6500	120°	1600	160-240	225*225*35
720-4606	18	3000	120°	1400	160-240	225*225*35

CEILING SURFACE MOUNTED CIRCULAR PANEL LIGHT



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Dimension (mm)
720-4101	6	6500	120°	380	160-240	Ø120*35
720-4102	6	3000	120°	350	160-240	Ø120*35
720-4103	12	6500	120°	900	160-240	Ø170*35
720-4104	12	3000	120°	800	160-240	Ø170*35
720-4105	18	6500	120°	1600	160-240	Ø225*35
720-4106	18	3000	120°	1400	160-240	Ø225*35



INDOOR LIGHTS

RECESS DOWN LIGHT CIRCULAR



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Cut Out (mm)	Dimension (mm)
720-9101	3	6500	36°	270	160-240	Ø68	Ø80*H56
720-9100	3	3000	36°	250	160-240	Ø68	Ø80*H56
720-9103	6	6500	36°	470	160-240	Ø68	Ø80*H56
720-9102	6	3000	36°	450	160-240	Ø68	Ø80*H56

White Finish | 28° Tilt Degree

RECESS DOWN LIGHT SQUARE



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Cut Out (mm)	Dimension (mm)
720-9601	3	6500	36°	270	160-240	Ø68	80*80*H56
720-9600	3	3000	36°	250	160-240	Ø68	80*80*H56
720-9603	6	6500	36°	470	160-240	Ø68	80*80*H56
720-9602	6	3000	36°	450	160-240	Ø68	80*80*H56

White Finish | 28° Tilt Degree

RECESS MOUNTED PANEL LIGHT



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Dimension (mm)
718-1609	36	6500	120°	3200	160-240	595*595*10
718-1610	36	3000	120°	3000	160-240	595*595*10




INDOOR LIGHTS

LED T8



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Lamp Base	Dimension (mm)
714-5101	9	6500	200°	820	160-240	G13	Ø25*L600
714-6101	18	6500	200°	1650	160-240	G13	Ø25*L1200

LED T8 Batten



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Lamp Base	Dimension (mm)
714-5001	9	6500	200°	820	160-240	G13	Ø45*L600
714-6001	18	6500	200°	1650	160-240	G13	Ø45*L1200

SURFACE MOUNTED T5 BATTEN



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Dimension (mm)
732-2601	9	6500	180°	900	160-240	587*H37
732-2602	9	3000	180°	800	160-240	587*H37
732-2701	18	6500	180°	1800	160-240	1187*H37
732-2702	18	3000	180°	1700	160-240	1187*H37



INDOOR LIGHTS

RECESS DIRECTIONAL DOWN LIGHT - WHITE



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Cut Out (mm)	Dimension (mm)
718-2101	6	6500	24°	365	160-240	Ø75	Ø95*H50
718-2102	6	3000	24°	320	160-240	Ø75	Ø95*H50
718-2103	10	6500	24°	720	160-240	Ø100	Ø120*H60
718-2104	10	3000	24°	650	160-240	Ø100	Ø120*H60

White Inner Ring | Crystal Series with White Reflector | Die Cast Aluminium Body

RECESS DIRECTIONAL DOWN LIGHT - BLACK



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Cut Out (mm)	Dimension (mm)
718-2105	6	6500	24°	365	160-240	Ø75	Ø95*H50
718-2106	6	3000	24°	320	160-240	Ø75	Ø95*H50
718-2107	10	6500	24°	720	160-240	Ø100	Ø120*H60
718-2108	10	3000	24°	650	160-240	Ø100	Ø120*H60

Black Inner Ring | Crystal Series with Black Reflector | Die Cast Aluminium Body



INDOOR LIGHTS

RECESS MOUNTED CABINET LIGHT



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Cut Out (Ømm)	Dimension (mm)
716-1101	3	4000	30°	240	160-240	45	Ø50*H26
716-1102	3	3000	30°	220	160-240	45	Ø50*H26
716-1103	3	4000	30°	240	160-240	45	Ø50*H26
716-1104	3	3000	30°	220	160-240	45	Ø50*H26
716-1105	3	4000	30°	240	160-240	45	Ø50*H26
716-1106	3	3000	30°	220	160-240	45	Ø50*H26

SURFACE MOUNTED CABINET LIGHT



Product Code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	Dimension (mm)
716-4101	3	4000	30°	400	160-240	Ø58*H14
716-4102	3	3000	30°	380	160-240	Ø58*H14
716-4103	3	4000	30°	400	160-240	Ø58*H14
716-4104	3	3000	30°	380	160-240	Ø58*H14
716-4105	3	4000	30°	400	160-240	Ø58*H14
716-4106	3	3000	30°	380	160-240	Ø58*H14



WALL LIGHTS



Product Code	Wattage (W)	CCT (K)	Lumen (lm)	Voltage (VAC)	Finish	Dimension (mm)
742-0010	6	3000	510	160-240	White	100*100*80



Product Code	Wattage (W)	CCT (K)	Lumen (lm)	Voltage (VAC)	Finish	Dimension (mm)
742-0020	6	3000	510	160-240	White	200*100*80



Product Code	Wattage (W)	CCT (K)	Lumen (lm)	Voltage (VAC)	Finish	Dimension (mm)
742-0030	12	3000	1020	160-240	White	160*110*90



Product Code	Wattage (W)	CCT (K)	Lumen (lm)	Voltage (VAC)	Finish	Dimension (mm)
742-0040	12	3000	1020	160-240	White	160*110*90



Product Code	Wattage (W)	CCT (K)	Lumen (lm)	Voltage (VAC)	Finish	Dimension (mm)
742-0050	9	3000	765	160-240	White	340*105*48



WALL LIGHTS



Product Code	Wattage (W)	CCT (K)	Lumen (lm)	Voltage (VAC)	Finish	Dimension (mm)
742-0060	12	3000	1020	160-240	White	135*125*80



Product Code	Wattage (W)	CCT (K)	Lumen (lm)	Voltage (VAC)	Finish	Dimension (mm)
742-0070	12	3000	1020	160-240	White	124*125*80



Product Code	Wattage (W)	CCT (K)	Lumen (lm)	Voltage (VAC)	Finish	Dimension (mm)
742-0080	12	3000	1020	160-240	White	370*90*80



Product Code	Wattage (W)	CCT (K)	Lumen (lm)	Voltage (VAC)	Finish	Dimension (mm)
742-0090	18	3000	1530	160-240	White	560*220*95



Product Code	Wattage (W)	CCT (K)	Lumen (lm)	Voltage (VAC)	Finish	Dimension (mm)
742-0100	6	3000	510	160-240	White	105*105*105



OUTDOOR LIGHTS

FLOOD LIGHT



Product code	Wattage (W)	CCT (K)	Beam Angle	Lumen (lm)	Voltage (VAC)	IP	Dimension (mm)
730-1001	10	6500	120°	1000	160-240	IP65	159*128*H57
730-1002	10	3000	120°	800	160-240	IP65	159*128*H57
730-1003	20	6500	120°	2000	160-240	IP65	178*165*H58
730-1004	20	3000	120°	1800	160-240	IP65	178*165*H58
730-1005	30	6500	120°	3000	160-240	IP65	203*185*H63
730-1006	30	3000	120°	2800	160-240	IP65	203*185*H63
730-1009	50	6500	120°	5000	160-240	IP65	242*180*H53
730-1010	50	3000	120°	4800	160-240	IP65	242*180*H53



LED DRIVER - 12V DC IP67



Product Code	Wattage (W)	Output Current	Output Voltage	Power Factor	Voltage (VAC)	Dimension (mm)
740-1001	35	2.92A	12	≥0.90	100-240V	182*42*34
740-1003	60	5A	12	≥0.90	100-240V	178*66*34
740-1005	100	8.33A	12	≥0.90	100-240V	211*67*34
740-1007	150	12.5A	12	≥0.90	100-240V	248*68*39

LED DRIVER - 24V DC IP67



Product Code	Wattage (W)	Output Current	Output Voltage	Power Factor	Voltage (VAC)	Dimension (mm)
740-1002	35	1.46A	24	≥0.90	100-240V	182*42*34
740-1004	60	2.5A	24	≥0.90	100-240V	162*68*34
740-1006	100	4.17A	24	≥0.90	100-240V	200*67*34
740-1008	150	6.25A	24	≥0.90	100-240V	238*68*39



DRIVERS

LED DRIVER - CONSTANT CURRENT IP20



Product Code	Wattage (W)	Output Current	Output Voltage	Power Factor	Voltage (VAC)	Dimension (mm)
740-1501	3	300mA	6-12	≥0.50	85-265V	80*31*20
740-1502	7	300mA	12-25	≥0.95	85-265V	86*35*22
740-1503	12	300mA	20-43	≥0.95	85-265V	96*35*22
740-1504	20	300mA	36-72	≥0.95	85-265V	118*40*25
740-1505	28	300mA	54-100	≥0.95	85-265V	134*40*25
740-1506	36	300mA	90-130	≥0.95	85-265V	144*44*28
740-1507	40	1200mA	20-43	≥0.95	85-265V	146*46*34
740-1508	50	1500mA	20-36	≥0.95	85-265V	144*44*28